
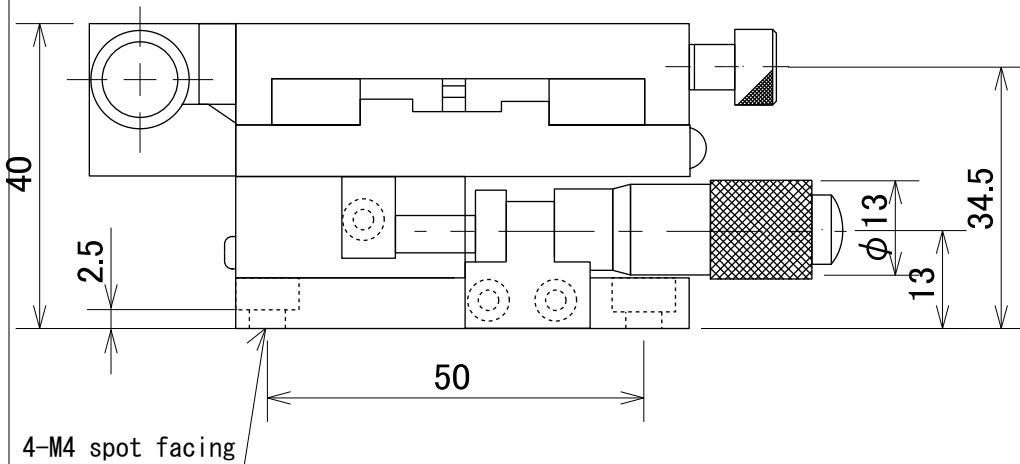


# Fine-positioning XY stage

Stage surface : 60 x 60 mm

Movable range :  $\pm 6.5$  mm

Withstand load : 4.5 kg

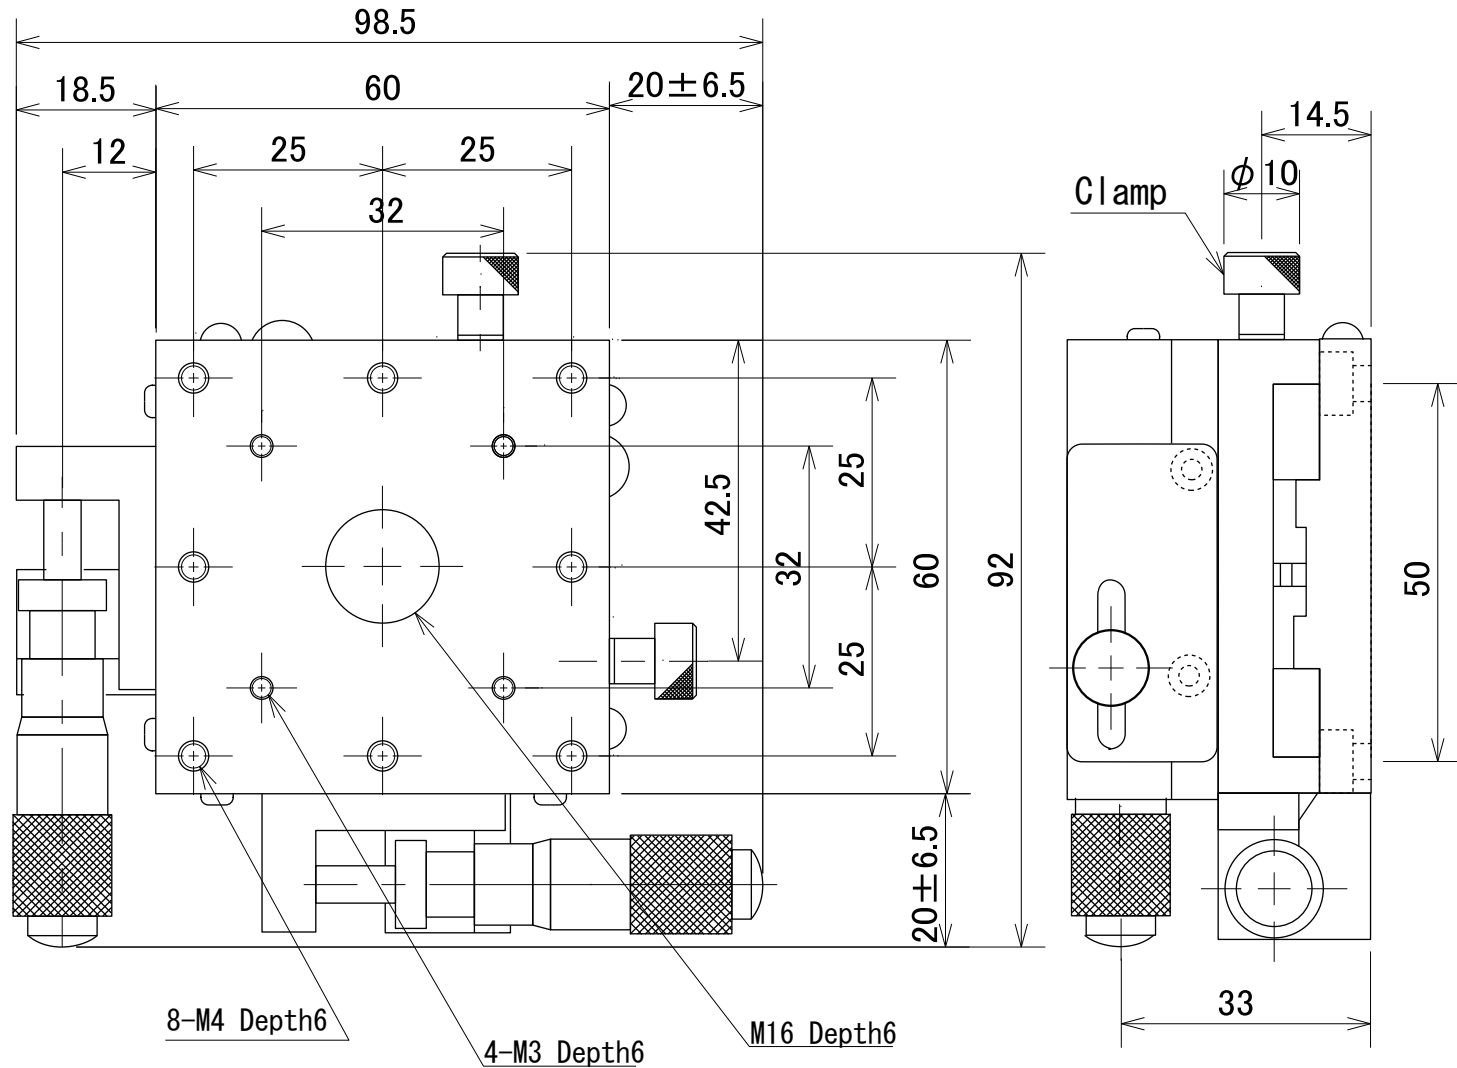

## LV-0015

ONOSOKKI