

NEW MODEL

ONOSOKKI

FV Series

F/V Converter

FV-1400

HIGH-SPEED F/V CONVERTER




Frequency range up to 120kHz

● Features

- With a very high speed, available to convert frequency to voltage every one period of a signal.
- CAL signal output (ZERO/FULL).
- DC power input (12~42VDC) is convenient for in-vehicle use.
- Frequency/Rotation speed display is selectable.
- Easy to recognize measured value and setting menu, using a fluorescent character display tube.
- Digital switch makes it easy to set frequency/rotation speed.
- Possible to stack upward(Designed for vertical stacking).



● Outer Dimensions

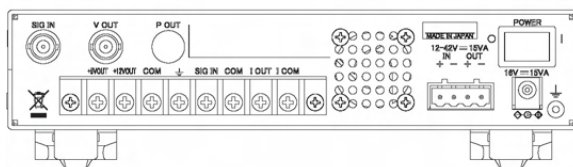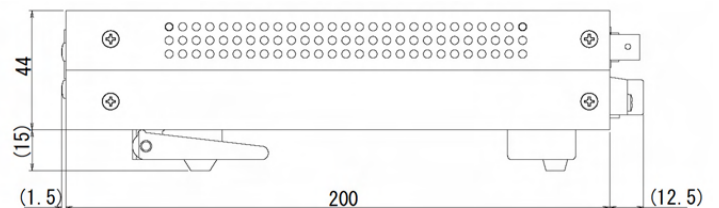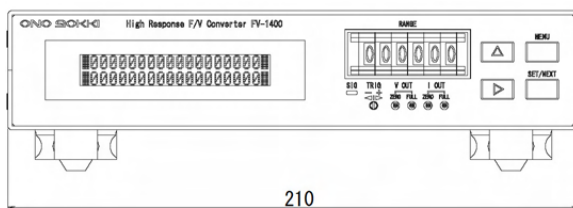


Rear View

Discontinued
(Reference only)

● FV-1400 Specifications

INPUT		SETTING	
Input method	AC/DC conversion (Option: Line-driver input)	Frequency/Rotation speed	Digital switch
Input voltage	AC: 0.3 to 30Vp-p DC: Lo ; + 1V or less, Hi ; + 4 to 30V	· Full-scale mode · Deviation output mode	Max. frequency / rotation speed
Input frequency range	1Hz to 120kHz		Central frequency (Central rotation speed) , Deviation output range ; ± 1, ± 5, ± 10, ± 20, ± 50%
Input terminal	BNC, Terminal		1 to 120,000 on a 1Hz or 1r/min basis
Isolation	Input / Output / Power	Input frequency range	1 to 3,600 P/R(for rotation speed measurement)
OUTPUT		FUNCTIONS	
Voltage output		Moving average	●Average number of times (2, 4, 8, 16 or 32) ●ON/OFF setting
· Full-scale	0 to 10V		+ 12V / 150mA
· Deviation	- 5 to + 5V	POWER SUPPLY FOR	or + 5V / 150mA
· Linearity	± 0.1% / °C (F.S.)	SENSOR	
· Resolution	16 bits	GENERAL SPECIFICATIONS	
· Temperature	± 0.02% / F.S. / °C	Power supply	12 to 42VDC or Dedicated AC adaptor (100 to 240VAC)
coefficient		Power consumption	Approx. 15VA
· Response	1 period of input frequency: + 7.6 μs	Operating temp. range	0 to + 40°C
Current output	0 to 16mA, or 4 to 20mA	Outer dimensions	210(w) x 44(H) x 200(D)mm
DISPLAY		Weight	Approx. 1 kg
Display part	Fluorescent character display tube		
Display unit	Hz or r/min selectable		
Display range	1Hz to 120,000 Hz or 1 to 120,000 r/min (Rotation speed confined to max. frequency)		

● Application (Example)

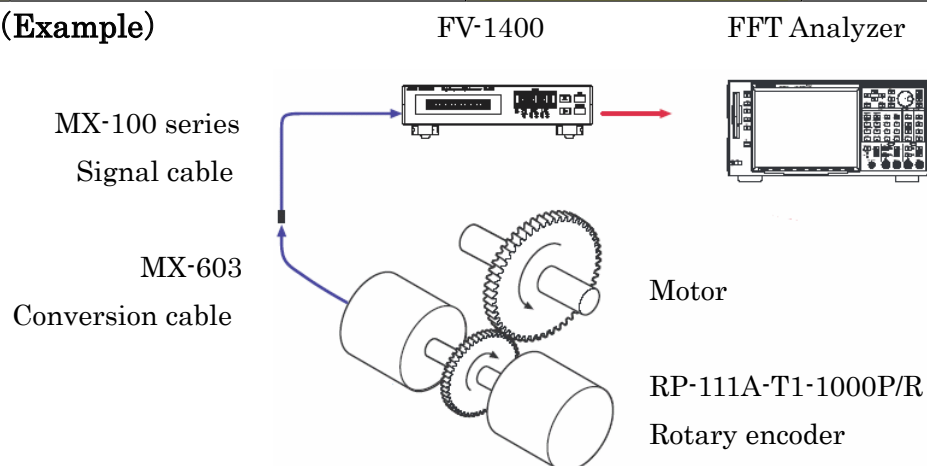

* Outer appearance and specifications are subject to change without prior notice.

URL: <http://www.onosokki.co.jp/English/english.htm>

U.S.A. & CANADA
Ono Sokki Technology Inc.
2171 Executive Drive, Suite 400
Addison, IL. 60101 U.S.A.
Phone : 630-627-9700
Fax : 630-627-0004
URL : <http://www.onosokki.net>
E-mail : info@onosokki.net

THAILAND
Ono Sokki (Thailand) Co., Ltd.
29/67 Moo 5 Tivanon Road, Pakkred,
Nonthaburi 11120, Thailand
Phone : 02-964-3884
Fax : 02-964-3887
E-mail : osth_sales@onosokki.co.jp

P.R.CHINA
Ono Sokki Beijing Office
Beijing Jing Guang Center 3510
Hu Jia Lou, Chao Yang Qu
Beijing P.R.C. 100020
Phone : 010-6597-3113
Fax : 010-6597-3114
E-mail : onosokki@public.bta.net.cn

WORLDWIDE
Ono Sokki Co., Ltd.
1-16-1 Hakusan, Midori-ku,
Yokohama 226-8507, Japan
Phone : 045-935-3976
Fax : 045-930-1906
E-mai : overseas@onosokki.co.jp