


A特性音響パワーレベル

| | | | |
|-------|------------|-------|---------------------------|
| 機械名 | Controller | 測定方法 | 残響室法音響パワーレベル |
| タイプ | | 時定数 | Fast |
| 備考(1) | | 測定容積 | 304.00 2003/3/ |
| 備考(2) | | 測定表面積 | 219.40 [m ²] |
| 備考(3) | | 気温 | 23.00 [] |
| | | 相对湿度 | 64.00 [%RH] |
| | | 大気圧 | 1013.00 [hPa] |
| | | 測定日時 | 2003/3/3 5:24 |

| 中心周波数 [Hz] | A特性音響パワーレベル [dB] |
|-------------|------------------|
| 100 | 6.7 |
| 125 | 11.5 |
| 160 | 17.1 |
| 200 | 26.6 |
| 250 | 30.1 |
| 315 | 36.4 |
| 400 | 42.2 |
| 500 | 44.2 |
| 630 | 46.6 |
| 800 | 46.1 |
| 1000 | 50.5 |
| 1250 | 50.2 |
| 1600 | 51.0 |
| 2000 | 49.7 |
| 2500 | 52.0 |
| 3150 | 51.1 |
| 4000 | 53.8 |
| 5000 | 54.2 |
| 6300 | 52.5 |
| 8000 | 50.7 |
| 10000 | 48.1 |
| A特性音響パワーレベル | 62.4 |

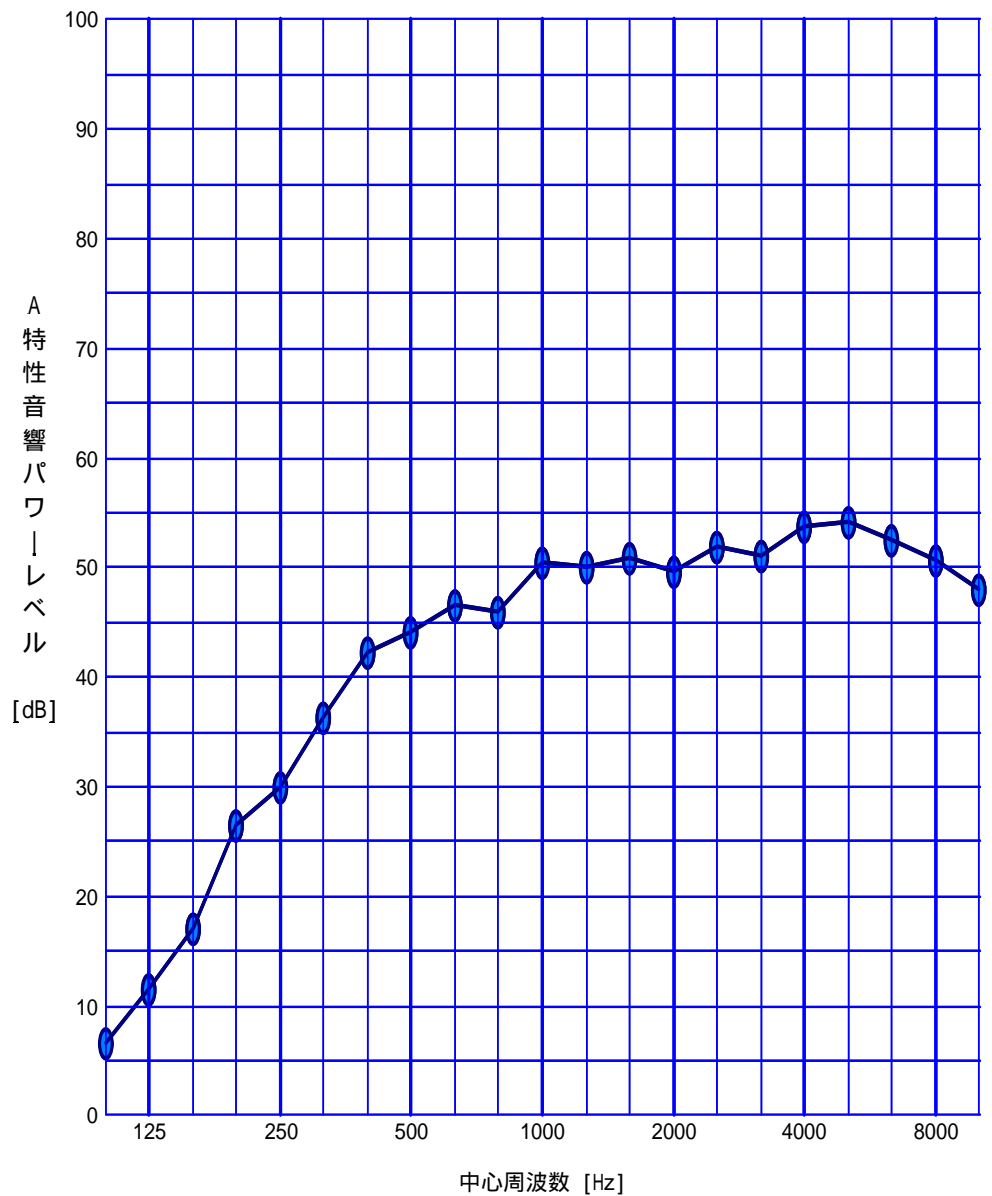

A特性音響パワーレベル

| | | | |
|-------|------------|-------|---------------------------|
| 機械名 | Controller | 測定方法 | 残響室法音響パワーレベル |
| タイプ | | 時定数 | Fast |
| | | 測定容積 | 304.00 2003/3/ |
| 備考(1) | | 測定表面積 | 219.40 [m ²] |
| 備考(2) | | 気温 | 23.00 [] |
| 備考(3) | | 相对湿度 | 64.00 [%RH] |
| | | 大気圧 | 1013.00 [hPa] |
| | | 測定日時 | 2003/3/3 5:24 |

| 中心周波数 [Hz] | A特性音圧レベル[dB] | | | | | | | | | | | | | 残響 [s] | 補正值 [dB] |
|---------------|--------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-----|-------|------|-----------|-------------|
| | No. 1 | No. 2 | No. 3 | No. 4 | No. 5 | No. 6 | No. 7 | No. 8 | No. 9 | No. 10 | 暗騒音 | 平均 | 偏差 | | |
| 100 | 8.37 | 6.85 | 8.37 | 6.85 | 8.37 | 6.85 | | | | | | 7.7 | 0.83 | 19.04 | -1.17 |
| 125 | 14.17 | 7.84 | 14.17 | 7.84 | 14.17 | 7.84 | | | | | | 12.1 | 3.46 | 16.48 | -0.96 |
| 160 | 19.31 | 15.53 | 19.31 | 15.53 | 19.31 | 15.53 | | | | | | 17.8 | 2.07 | 16.32 | -0.77 |
| 200 | 27.33 | 26.34 | 27.33 | 26.34 | 27.33 | 26.34 | | | | | | 26.9 | 0.54 | 14.21 | -0.63 |
| 250 | 29.29 | 30.01 | 29.29 | 30.01 | 29.29 | 30.01 | | | | | | 29.7 | 0.40 | 11.86 | -0.51 |
| 315 | 35.74 | 35.79 | 35.74 | 35.79 | 35.74 | 35.79 | | | | | | 35.8 | 0.03 | 11.11 | -0.41 |
| 400 | 41.84 | 41.26 | 41.84 | 41.26 | 41.84 | 41.26 | | | | | | 41.6 | 0.32 | 10.85 | -0.32 |
| 500 | 43.45 | 42.41 | 43.45 | 42.41 | 43.45 | 42.41 | | | | | | 43.0 | 0.57 | 9.41 | -0.26 |
| 630 | 45.55 | 44.89 | 45.55 | 44.89 | 45.55 | 44.89 | | | | | | 45.2 | 0.36 | 9.09 | -0.21 |
| 800 | 42.83 | 44.86 | 42.83 | 44.86 | 42.83 | 44.86 | | | | | | 44.0 | 1.11 | 7.58 | -0.16 |
| 1000 | 48.00 | 48.31 | 48.00 | 48.31 | 48.00 | 48.31 | | | | | | 48.2 | 0.17 | 7.10 | -0.13 |
| 1250 | 47.42 | 47.80 | 47.42 | 47.80 | 47.42 | 47.80 | | | | | | 47.6 | 0.21 | 6.75 | -0.11 |
| 1600 | 47.48 | 48.89 | 47.48 | 48.89 | 47.48 | 48.89 | | | | | | 48.2 | 0.77 | 6.45 | -0.08 |
| 2000 | 45.98 | 46.96 | 45.98 | 46.96 | 45.98 | 46.96 | | | | | | 46.5 | 0.54 | 5.81 | -0.07 |
| 2500 | 47.37 | 48.48 | 47.37 | 48.48 | 47.37 | 48.48 | | | | | | 48.0 | 0.61 | 4.80 | -0.05 |
| 3150 | 45.90 | 46.94 | 45.90 | 46.94 | 45.90 | 46.94 | | | | | | 46.5 | 0.57 | 4.16 | -0.04 |
| 4000 | 47.94 | 49.49 | 47.94 | 48.49 | 47.94 | 48.49 | | | | | | 48.4 | 0.60 | 3.61 | -0.03 |
| 5000 | 48.64 | 47.91 | 47.64 | 47.91 | 47.64 | 47.91 | | | | | | 48.0 | 0.37 | 2.94 | -0.03 |
| 6300 | 45.21 | 44.93 | 45.21 | 44.93 | 45.21 | 44.93 | | | | | | 45.1 | 0.15 | 2.29 | -0.02 |
| 8000 | 41.53 | 42.16 | 41.53 | 42.16 | 41.53 | 42.16 | | | | | | 41.9 | 0.35 | 1.72 | -0.02 |
| 10000 | 38.21 | 38.80 | 38.21 | 38.80 | 38.21 | 38.80 | | | | | | 38.5 | 0.33 | 1.49 | -0.01 |
| Overall | 57.74 | 58.32 | 57.63 | 58.20 | 57.63 | 58.20 | | | | | | 57.96 | | | |